


N.B. : Possibile versione elicoidale CIG32PH

# Mod.CIG32P

REDUCTION RATIO	L	REDUCTION RATIO	L
1/4~1/5	22.1	1/51~1/139	34.9
1/14~1/27	28.5	1/189~1/721	41.3

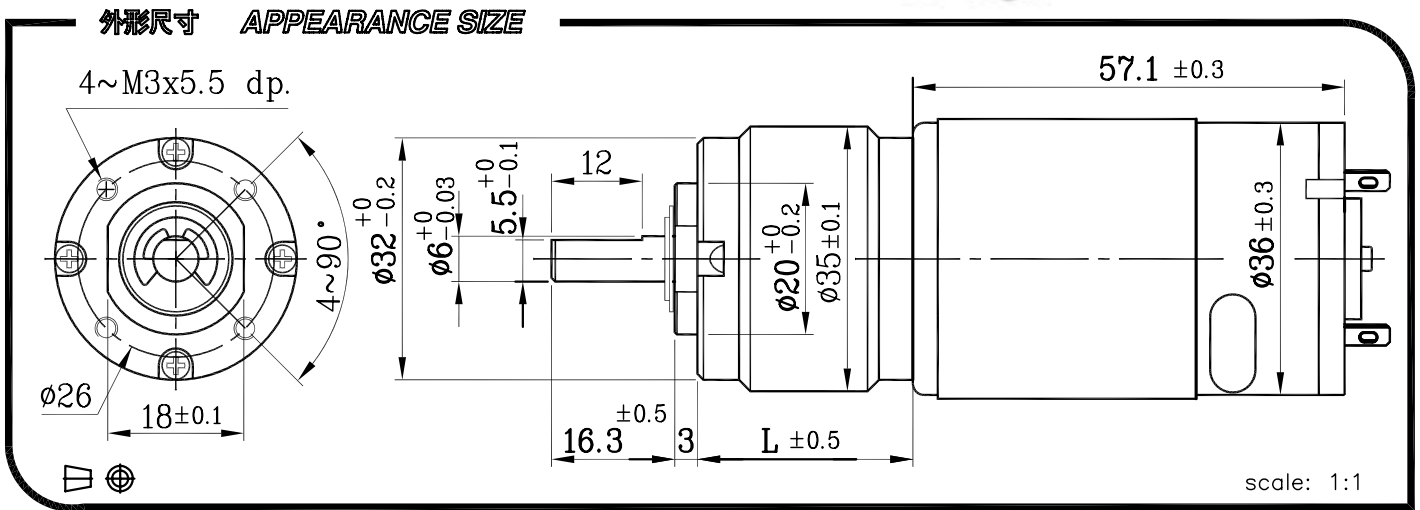

## GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721				
		1.0	2.4	3.3	4.7	7.6	8	10	10	12	12	12	12				
12V	定格扭力(Kg-cm) Rated torque	1.0	2.4	3.3	4.7	7.6	8	10	10	12	12	12	12				
	定格回轉數(rpm) Rated speed	950	359	257	183	97	71.5	52	39	29	21	11	8				
24V	定格扭力(Kg-cm) Rated torque	1.0	2.3	3.2	4.5	7.3	8	10	10	12	12	12	12				
	定格回轉數(rpm) Rated speed	990	375	268	192	101	74.5	54	40	29.5	22	11.5	8				

## 馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1600	6000	≤ 250	12.80	220
24	240	5150	≤ 750	6000	≤ 130	12.70	220

## 馬達單體特性圖 / MOTOR CHARACTERISTICS

