


AC AXIAL FAN

■ FP-108CX/DC / 162 x 150 x 38 mm URANUS ■ ขนาดและรูปร่าง

■ DESIGN FEATURES

- BEARING SYSTEM : SLEEVE BEARING & BALL BEARING
- IMPELLER : PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- HOUSING : DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR PLASTIC
- MOTOR : BRUSHLESS DC
- CONNECTING : WIRE LEADS
- SPEED : S-1 HIGH SPEED TYPE / S-2 MEDIUM SPEED TYPE
- AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL
- AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL

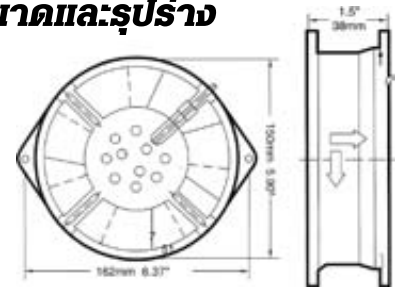


■ FP-108K / 220∅ x 60 mm NEPTUNE

■ DESIGN FEATURES

- BEARING SYSTEM : BALL BEARING
- IMPELLER : PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- HOUSING : DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- MOTOR : SHADED POLE, IMPEDANCE PROTECTED
- CONNECTING : WIRE LEADS

■ ขนาดและรูปร่าง

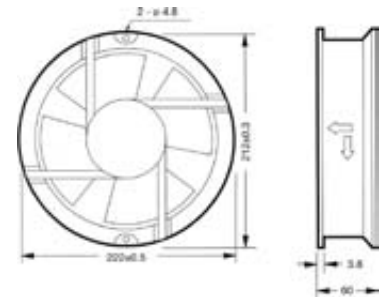


■ FP-108EX / 172 x 150 x 51 mm MARS

■ FP-108E / 172∅ x 51 mm

■ DESIGN FEATURES

- BEARING SYSTEM : BALL BEARING
- IMPELLER : PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- HOUSING : DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- MOTOR : SHADED POLE, IMPEDANCE PROTECTED
- CONNECTING : WIRE LEADS

■ ขนาดและรูปร่าง

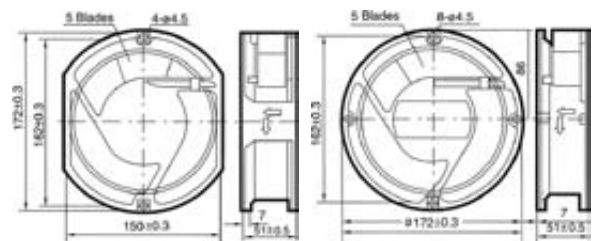


■ FP-108-1 / 119 x 119 x 38 mm VENUS

■ DESIGN FEATURES

- BEARING SYSTEM : BALL BEARING
- IMPELLER : PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- HOUSING : DIE-CAST ALUMINUM PAINTED BLACK OR NATURAL COLOR
- MOTOR : SHADED POLE, IMPEDANCE PROTECTED
- CONNECTING : WIRE LEADS

■ ขนาดและรูปร่าง

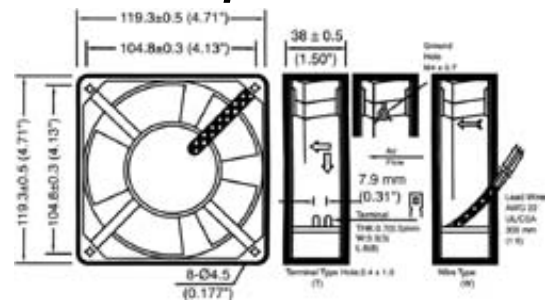

■ ข้อมูลทางเทคนิค

Model No.	แรงดันไฟฟ้า (V)	ความถี่ (Hz)	กำลังไฟฟ้า (Watt)	กระแสไฟฟ้า (A)	ความเร็วรอบ (RPM)	ระดับเสียง (dBA)	ปริมาณลม (M3/min)	Static Pressure (INCH-H2O)	Air (CFM)
FP-108CX/DC (S-1)	24	50	9.6	0.4	2200	42	4	0.35	140
	48	50	11.04	0.23	2200	42	4	0.35	140
FP-108K	220/240	50	44	0.3	2400	56	10.2	0.9	360
FP-108EX (S-1)	110/120	50/60	38/35	0.5/0.45	2800/3100	50/45	5.4/6.6	0.63/0.79	190/235
FP-108E (S-1)	220/240	50/60	32/31	0.23/0.21	2800/3100	50/45	5.4/6.6	0.63/0.79	190/235
FP-108-1 (S-ULTRA)	220/240	50/60	18/19	0.14/0.12	2700/3000	40/45	3.18/3.40	0.27/0.3	112/120