



X

- [News & Media](#)
- [Fairs](#)
- [Contact](#)
- 
- 
- [Products](#)
- [Applications](#)
- [Company](#)
- [Request](#)




--- Navigation ---

Levelling elements BNV/BNVS

Selection

Item no.: 08-0016 Tags: [bnvs200](#), [bnvs80](#)

- Available, delivery time on request

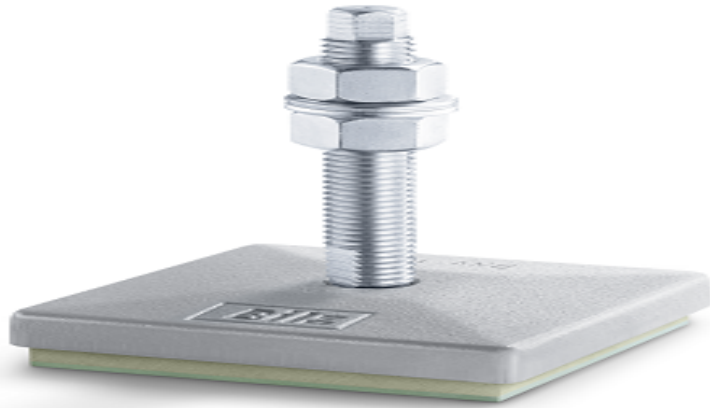

Description

Details (technical data)

Accessories

Enquiry

1x Levelling elements BNV/BNVS	1.00 €
Subtotal 1.00 €	

Related Products


pre

Gizlilik - Şartlar

Details (technical data)

Note

- The specified maximum load is composed of static and dynamic loading of the machine. The best insulation effect is achieved at approximately 80-90 % of the specified maximum load.
- The type of insulation pads used can be found in the type description, e.g. BNV 80/4 is equipped with B4, BNVS 115/0 with B0 etc.
- Permissible temperature range: -20 °C bis +80 °C

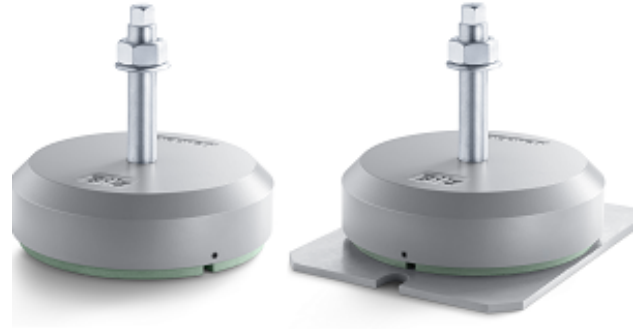

LEVELLING ELEMENTS BNSH / BNSHA

[READ MORE](#)

Insulation pad properties

B4

- Medium hard pad with good vibration and structure-borne noise insulation.
- Universal application

B0


- Non profile insulation pad with very high levelling consistency, e.g. for lathes, machining centres etc.

B30W

- Soft matching for a very good insulation effect, e.g. for grinding machines, test equipment, measuring machines, etc.

Colour

RAL 7037, dusty grey

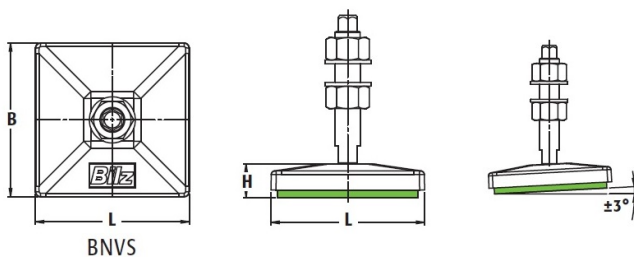

BNV / BNVS

Type BNV / BNVS	Item no. BNV	Item no. BNVS	max. load N/Stk.	L mm	B mm	H mm
50/4	08-0030	10-0013	2,000	60	60	22
80/4	08-0034	10-0023	4,700	85	85	24
110/4	08-0004	10-0004	12,000	123	123	28

Type BNV / BNVS	Item no. BNV	Item no. BNVS	max. load N/Stk.	L mm	B mm	H mm
115/4	08-0008	10-0026	11,400	163	88	29
150/4	08-0016	10-0009	18,000	147	147	32
200/4	08-0020	10-0025	37,000	264	165	44
50/0	08-0028	10-0011	4,000	60	60	22
80/0	08-0032	10-0021	9,500	85	85	24
110/0	08-0002	10-0002	24,000	123	123	28
115/0	08-0006	10-0027	22,800	163	88	29
150/0	08-0014	10-0007	36,000	174	147	32
200/0	08-0018	10-0028	74,000	264	165	44
50/30W	08-0029	10-0012	950	60	60	25
80/30W	08-0033	10-0022	2,300	85	85	27
110/30W	08-0003	10-0003	5,000	123	123	31
115/30W	08-0007	10-0029	4,500	163	88	32
150/30W	08-0015	10-0008	7,300	147	147	35
200/30W	08-0019	10-0030	15,000	264	165	47



Bilz Web

[Products](#)

[EPPC™ Bilz-VITAP Isolation Pads](#) [Leveling Feet](#) [Precision Leveling Wedges](#) [FAEBI® Rubber Air Springs](#) [BiAir® Membrane Air Springs](#) [AIS™ Active Isolation System](#) [Insulated Tables](#) [Vibration Site Survey](#) [Accessories](#) [Catalog](#)

Bilz internal

User
Password

Gizlilik - Şartlar



Login

Bilz Worldwide

[Sales and distribution in more than 40 countries](#)

[Find your distributor](#) 

Bilz Office

[Contact](#) [Legal Details](#) [Privacy Policy](#)

CONTACT

Tel.: +49 7152 30 91-0

Fax: +49 7152 30 91-10

Mail: [info\(at\)bilz.ag](mailto:info(at)bilz.ag)

ADDRESS

Bilz Vibration Technology AG

Böblinger Straße 25

D-71229 Leonberg

[Our standard terms in .PDF format can be downloaded here. See our Privacy Policy.](#)

© 2020 Bilz Vibration Technology AG

Your expert of Vibration Isolation

© 2017

[Back to Top](#)